


## Serie 2600 2610.171

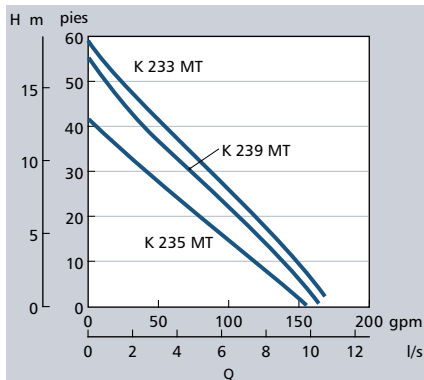

K = Impulsor resistente a los atascos.

Modelo	K 235 MT	K 239 MT	K 233 MT
Potencia, CV [kW]	1,3 (0,97)	1,8 (1,3)	1,9 (1,4)
Tensión, V/fase	115/230, 1~	115/230, 1~	460/575, 3~
Corriente nominal, A	11/5,6	15/7,4	2,6/2,1
Peso, libras (kg)	42 (19)	46 (21)	46 (21)
Máx. altura, pulg. [mm]	22" (570)	23" (594)	23" (594)
Máx. ancho, pulg. [mm]	7 3/4" (195)	7 3/4" (195)	7 3/4" (195)
Descarga Ø, pulg.	2"	2"	2"
Abertura de colador, pulg. (mm)	5/16" (7,5)	5/16" (7,5)	5/16" (7,5)
Líquido caliente, 158°F (70°C)	Sí	Sí	Sí

Disponibile en versiones MSHA 2610.082