


Serie 2600

2620.171

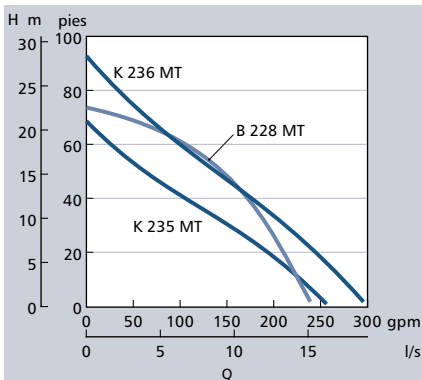

B = Impulsor resistente al desgaste. K = Impulsor resistente a los atascos.

Modelo	B 228 MT	K 235 MT	K 236 MT
Potencia, CV [kW]	3,5 (2,6)	2,4 (1,8)	3,5 (2,6)
Tensión, V/fase	460/575, 3~	230, 1~	460/573, 3~
Corriente nominal, A	4.7/3.6	10	4.7/3.6
Peso, libras (kg)	66 (30)	66 (30)	66 (30)
Máx. altura, pulg. [mm]	24" (617)	24" (617)	24" (617)
Máx. ancho, pulg. [mm]	9 1/2" (240)	9 1/2" (240)	9 1/2" (240)
Descarga Ø, pulg.	3"	3"	3"
Abertura de colador, pulg. (mm)	5/16" (7,5)	5/16" (7,5)	5/16" (7,5)
Líquido caliente, 158°F (70°C)	Sí	Sí	Sí

Disponible en versiones MSHA 2620.082